



Desktop Engraver

DE-3

Featuring laser-pointing technology, ethernet connectivity, automatic depth regulation and other intelligent enhancements, the DE3 is the smartest, most intuitive rotary engraver on the market.

Specifications		
Work Table Size	305 mm x 230 mm	
Maximum Work Area (Work Envelope)	X: 305 mm	
	Y: 230 mm	
	Z: 40 mm	
XYZ Axis Drive System	Stepper motor, 3-axis simultaneous control	
Operating Speed	XY Axis : 0.1~60 mm/sec. Z Axis : 0.1~30mm/sec.	
Software resolution	0.01 mm/step	
Mechanical Resolution	XYZ Axis: 0.00125 mm/step	
Spindle Motor	Brushless DC Motor	
Spindle Speed	5,000~20,000 rpm	
Tool Loading	Cutter Holder, Collet Type	
Maximum Material Thickness	40 mm (38 mm when using the nose cone)	
Connection	USB / Ethernet (10 BASE-T/100 BASE-TX automatic switching)	
Machine Language	RML-1	
Power Supply	Voltage and Frequency	AC 100 to 240 V ±10%, 50/60 Hz (Overvoltage category: Category II, IEC60664-1)
	Rated Current	1.0 A
Power Consumption	80 W	
Operating Noise	While Operating: 63 dB (or less), Standby: 40 dB (or less)	
Machine Weight	35 kg	
Installation Environment	Indoor use, altitude: 2000 m or less Temperature 5 to 40°C, humidity 35 to 80% (no dew condensation)	
	Environment pollution degree: 2	
Bundled Accessories	Power cord, power adapter, USB cable, nose cone unit (resin/metal components), nose unit set screw (fixing screw, spring), spare set screw (for cutter holder), Solid collet (ø 3.175 mm), spanner wrench, hex wrench, hex driver, adhesive sheet, dust collector adapter, DGSHAPE Software Package CD, Setup Guide	

DGSHAPE

At the forefront of advanced machine manufacturing for 37-years, Roland provides practical and reliable technology with unmatched service and support.


DGSHAPE, A Roland Company, further builds on this reliability promise by improving user experience with fast and effortless engraving machines, designed for those just starting out and for engraving experts looking for a more intuitive solution.

DE-3

DGSHAPE Engraver

OVER 30 YEARS OF
ENGRAVING EXPERTISE

DGSHAPE continues the legacy of Roland engraving with a new model that features laser-pointing technology, ethernet connectivity, automatic depth regulation, and other intelligent enhancements. The DE-3 is the smartest, most intuitive rotary engraver on the market.

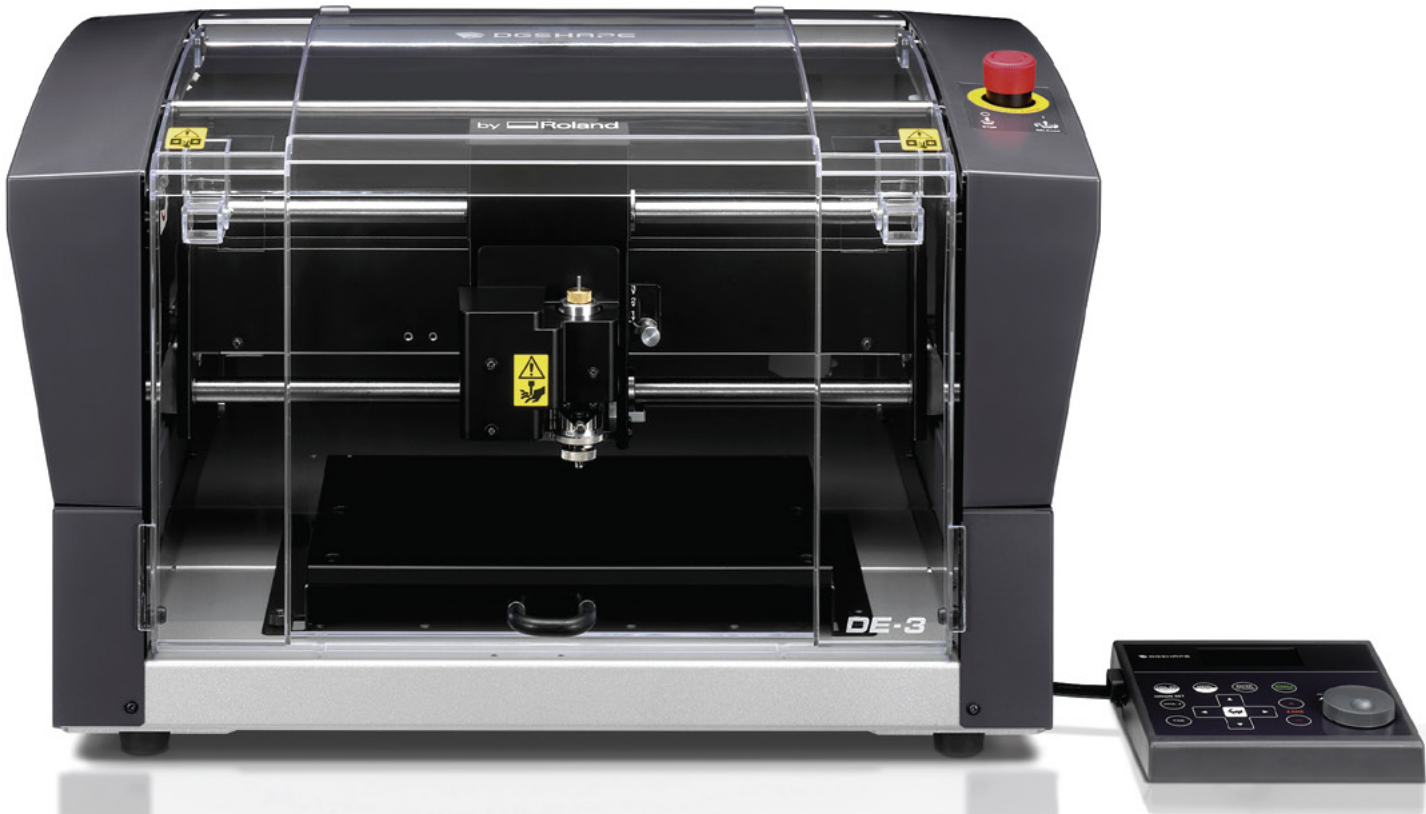

Built to Make Engraving Easy

Automated features offer a simplified set-up and operation to quickly and precisely engrave delicate and tough materials.



Fast Production

Advanced surface detection enables quick and simple set-up, while a 20,000 rpm DC brushless motor engraves at top speed.



Laser Pointer

Automatically define the origin point and view a path preview for accurate personalization every time.



User Replaceable Spindle

Easily-applied nose cones can be added to the spindle to precisely regulate engraving depth and avoid material scratching.



*shown with optional center vise



Open Architecture and New Software

The DE-3 works out-of-the-box with popular engraving software, industry standard tools, and materials. It also features Dr. Engrave Plus software that offers new user advantages.



Supports AI files and standard graphic/vector data.



Import Excel and CSV databases for fast engraving of serial data jobs.



Enables standard engraving as well as surface levelling and hole drilling.



Hand-Held Control

Without the need for a computer, users can store job data and perform machine operations.

Discover More Applications with DGSHAPE Engraving

Customize brass, aluminum, copper, engraving plastic, wooden items and more, with the speed, precision and ease of the powerfully compact DE-3.

Emergency power
supply control room

Information System Management Office

INFORMATION CENTER
Takashi James Fujimoto



Protect Your Investment

Take your business forward with complete peace of mind thanks to Roland DG's renowned post-sale service. Roland DG Care warranties cover you for much more than device maintenance.

- Factory-trained service engineers
- Quick installation and first-time set-up
- Expert advice and training